


Orange

Smart Technology
For Security ...

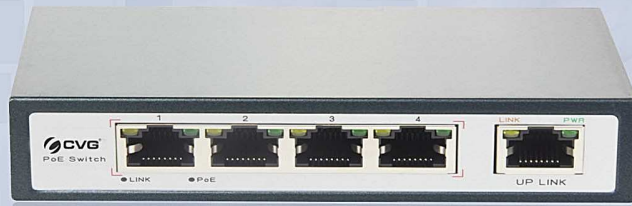

CV-5004EP-E

4 Port PoE Switch
1 Uplink Port: 10/ 100 Mbps
VLAN Enhanced security



Model		CV-5004EP-E
Power Supply	Power Supply Mode	Power Adaptor
	Voltage Range	DC48~56V
	Power Consumption	The device <5W, PoE power supply <120W
Network Port Parameter	Network Ports	1~4 Ethernet Port : 10/100Mbps
		1 Uplink Port : 10/100 Mbps
	Transmission Distance	1~4 Ethernet Port : 0~250m
		1 Uplink Port : 0~100m
	Transmission Media	1~4 Ethernet Port : Cat5e/6 standard UTP cable.
		Uplink Port : Cat5e/6 standard UTP cable
PoE Agreement	IEEE802.3 af/at standards	
PoE Power Supply Mode	End-span method	
PoE Power Supply Wattage	Each port≤30W,Whole device<120W	
Network Switch Specification	Network Standard	IEEE 802.3/802.3u
	Swap Mode	Store-and- forward
	Data-Caching Mechanism	448K
	MAC Address List	1K
Status Indicators	Power Indicator Light	One power light (red)
	Optical Fiber Port Indicator	One fiber link indication light (green), Green light keeps on when the fiber port is well connected; Blinking when transceiver data
	FE Uplink Port	LED (Green): On, port is link on Off, port is link down;LED(Yellow):on when link speed is 100M,Off when link speed is 10M Blink when transceiver data
	PoE Indicator	4 PoE indicator light (yellow)
	PoE Network Port LED	1~4 port (green light on RJ45 jack) Keeps on when normally connected, Blinking when transceiver data
	Reset Indicator	1 restart indication light (green), light on when press the button
	Vlan Indicator	One green indication light
Button/Switch	Reset Button	One button. Whole machine will restart while press the button.
	Vlan Switch	One, slide switch to "ON" + press restart button, Vlan function opens
Protection Level	Surge Immunity	Level 3, executive standard : IEC61000-4-5
	Electrostatic Protection	1a touch electric discharge: level 3
		1a Air discharge: level 3 Executive standard : IEC61000-4-2
Operating Environment	Working Temperature	0°C~55°C
	Storage Temperature	-40°C~70°C
	Humidity(non-congeal)	0~95%
Mechanical Attributes	Dimensions (L*W*H)	115mmx78mmx27mm
	Color	Black
	Weight	425g
Reliability	Mean time between failures (MTBF)	> 50000h